



Wall Plate & Equipment Installation Guide

1. Determine location of wall plate and mark.



2. Cut hole in wall.



3. Check against guide/bracket and adjust if necessary.



4. Trim wall to allow the bolt to go through.



5. Insert bracket in cavity.




6. Secure in place with tabs.



7. Locate cable from antenna in wall cavity.



8. Remove outer shroud from wall plate.

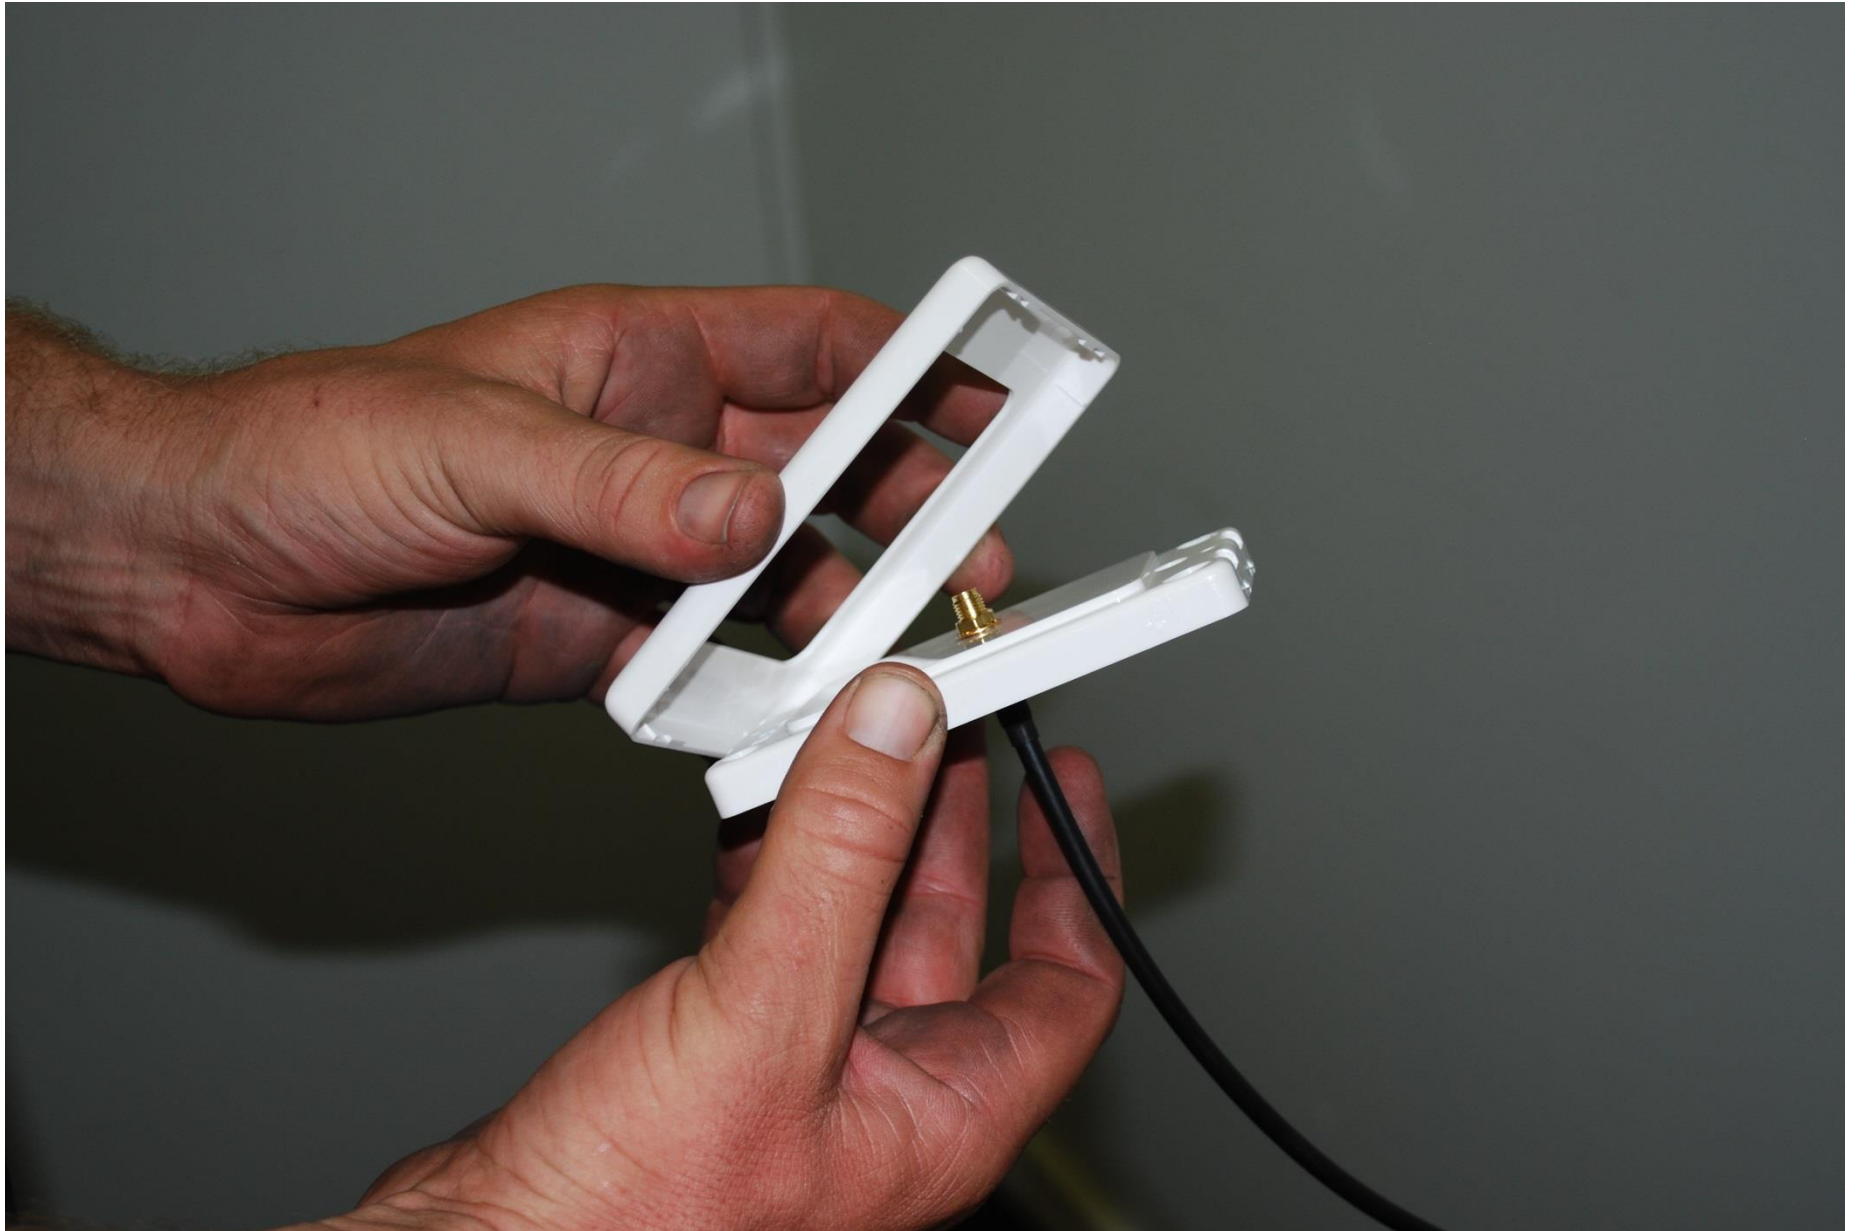

9. Connect cavity leads to antenna cable.



10. Feed cable back into wall cavity.



11. Check alignment of wall plate.



12. Put bolts through wall plate.



13. Align bolts with bracket.



14. Screw into place.



15. Reattach shroud.



16. Clean up plaster etc.



17. Connect device cable to wall plate.



18. Connect device able to device.

